(19) World Intellectual Property Organization

International Bureau





(43) International Publication Date 22 September 2005 (22.09.2005)

PCT

(10) International Publication Number WO 2005/088367 A1

(51) International Patent Classification⁷: B29D 11/00, B29C 39/14 G02B 6/00,

(21) International Application Number:

PCT/IB2004/000378

(22) International Filing Date: 13 February 2004 (13.02.2004)

(25) Filing Language:

English

(26) Publication Language:

English

- (71) Applicant (for all designated States except US): NOKIA CORPORATION [FI/FI]; Keilalahdentie 4, FIN-02150 Espoo (FI).
- (72) Inventor; and
- (75) Inventor/Applicant (for US only): ÖSTERGARD, Toni [FI/FI]; Pampinkatu 16 D 21, FIN-20900 Turku (FI).
- (74) Agent: COHAUSZ & FLORACK (24); Bleichstrasse 14, 40211 Düsseldorf (DE).
- (81) Designated States (unless otherwise indicated, for every kind of national protection available): AE, AG, AL, AM,

AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NA, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.


(84) Designated States (unless otherwise indicated, for every kind of regional protection available): ARIPO (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

Published:

with international search report

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

(54) Title: METHOD OF MANUFACTURING A LIGHT GUIDE

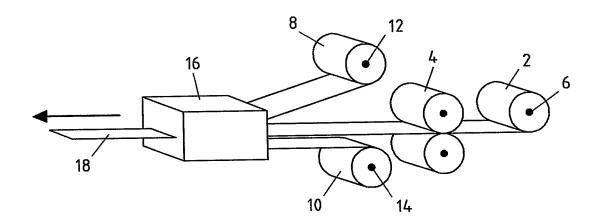

(57) Abstract: The invention relates to a method, an apparatus, a system and a light guide, in particular a backlighting, or front lighting light guide for user interfaces of electronic devices. To allow mass-production at low costs, it is proposed that a light guiding substrate is provided as a continuous foil, and that diffractive gratings are embossed on at least one side of said foil by rolling.

